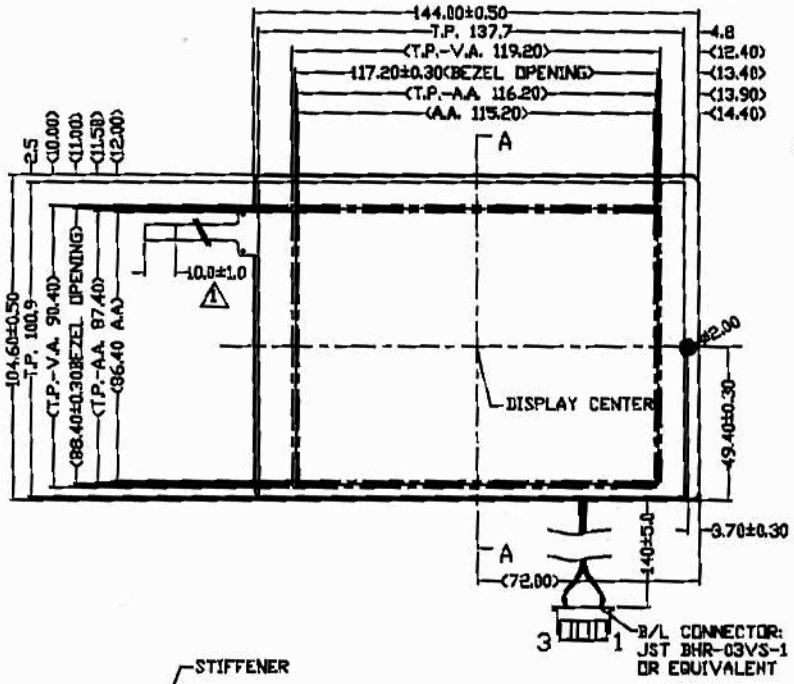

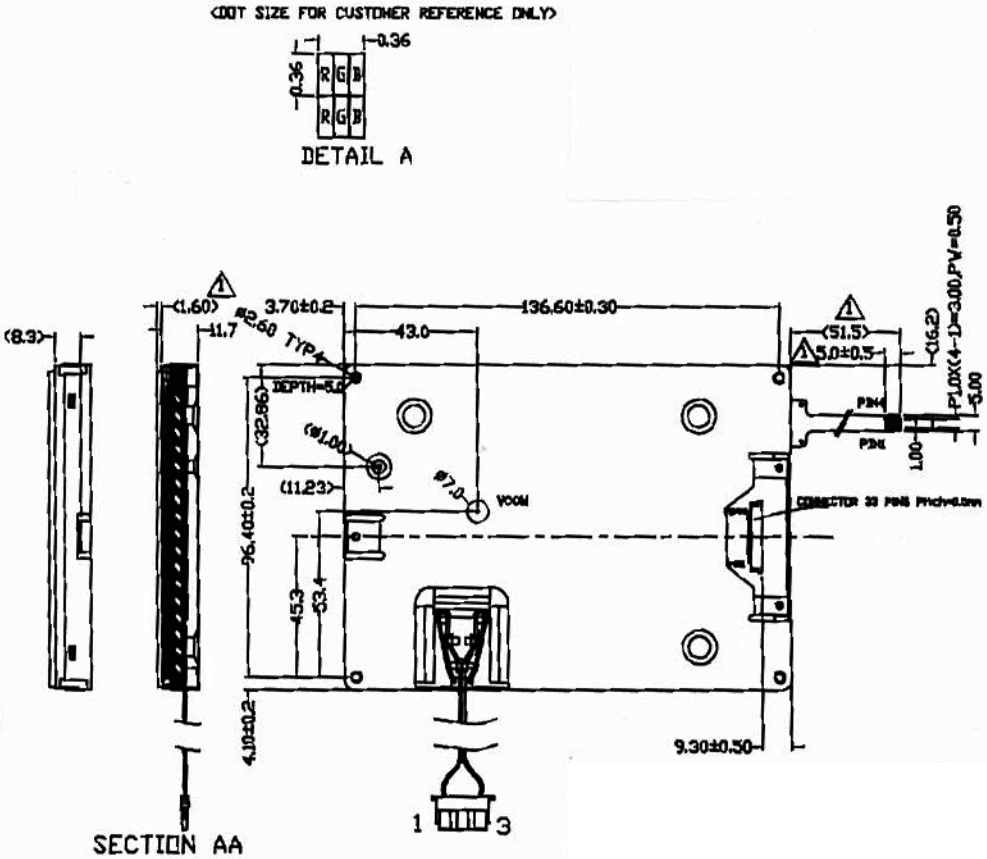

PIN ASSIGNMENT

1	2	3	4	5	6	7	8	9	10	11
GND	CK	HSYNC	VSYNC	GND	R0	R1	R2	R3	R4	R5
12	13	14	15	16	17	18	19	20	21	22
GND	G0	G1	G2	G3	G4	G5	GND	B0	B1	B2
23	24	25	26	27	28	29	30	31	32	33
B3	B4	B5	GND	ENAB	VCC	+5V	R/L	U/D	RST	GND

TOUCH PANEL CONNECTION

1	2	3	4
XR	YD	XL	YU

BACKLIGHT CONNETOR:

1	3
ANODE	CATHODE

DISPLAY TYPE	5.7" TFT, 1VE, TRANSMISSIVE		
DISPLAY RESOLUTION	320xRGBx240		
VIEWING ANGLE	6 O'CLOCK		
MUX AND BIAS RATIO	1/240 DUTY		
LOGIC VOLTAGE(V)	+3.3V		
LCD DRIVING VOLTAGE	TBD		
OPERATION TEMPERATURE	-20°C TO +70°C		
STORAGE TEMPERATURE	-30°C TO +80°C		
BACKLIGHT	TYPE	LED01	
	COLOR	WHITE	
	WAVELENGTH	--	
	DRIVING VOLTAGE	-16.5V , 120mA	
	LUMINANCE (cd/m2) (ON THE BACKLIGHT SURFACE)	MIN.	6000
		TYP.	6500
		MAX.	
REMARK			

NOTES:

1. ◇ : SPECIAL CHARACTERISTIC
2. + : SAFETY CHARACTERISTIC
3. ▽ : CRITICAL DIMENSION
4. ( ) : REFERENCE DIMENSION