
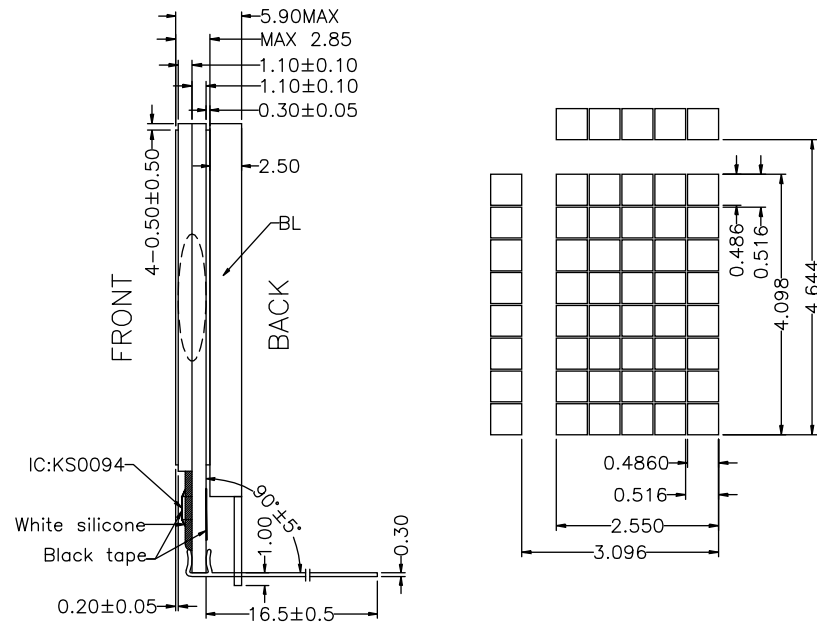


VIEWING DIRECTION

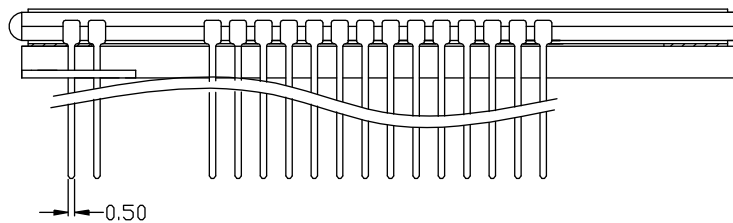

Specification:

- 1). STN/Positive/Yellow-Green/Transflective mode
- 2). 1/33 Duty, 1/6.7 Bias, Vop=6.5V
- 3). Viewing direction: 6 O'clock
- 4). Operating temp.: -10~+50°C
Storage temp.: -20~+60°C
- 5). Using IC: KS0094

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	Rest	VSS	VDD	Vout	VR	V0	V1	V2	V3	V4	SCLK	SDA	CS	RS	LED+	LED-