




**NOTES :**

DISPLAY: 8.0" TFT TRANSMISIVE  
 VIEW DIRECTION: IPS  
 NUMBER OF DOTS: 800(RGB) \* 1280 DOTS  
 Color NUMBER: 16.7M  
 BackLight: LED White(21)  
 OPERATION TEMP. : 0° C to +50° C  
 STORAGE TEMP. : -10° C to +60° C  
 RoHS COMPLIANCE

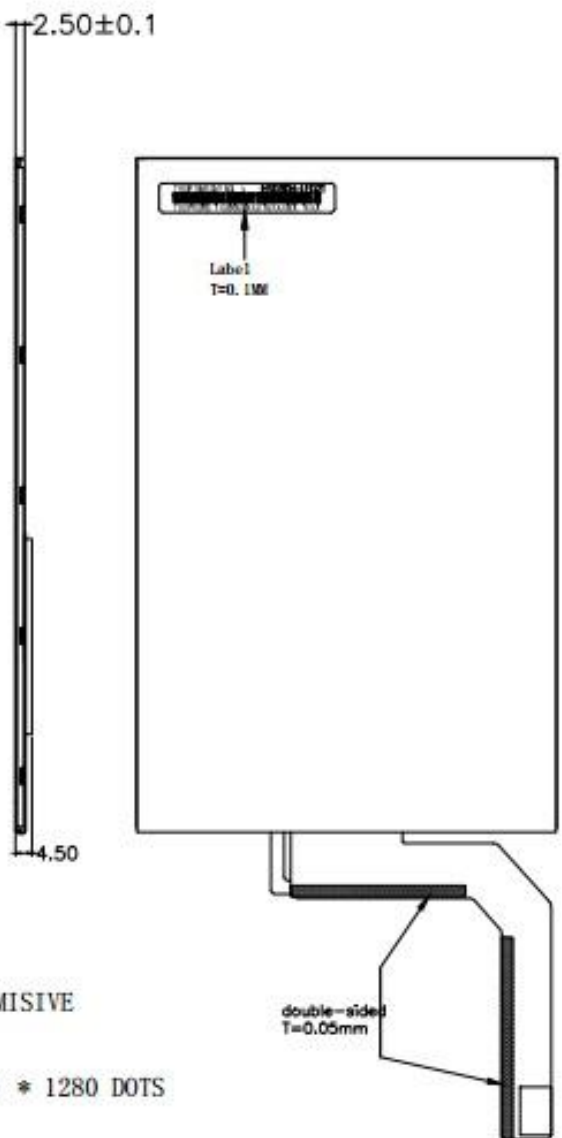

**CIRCUIT DIAGRAM**

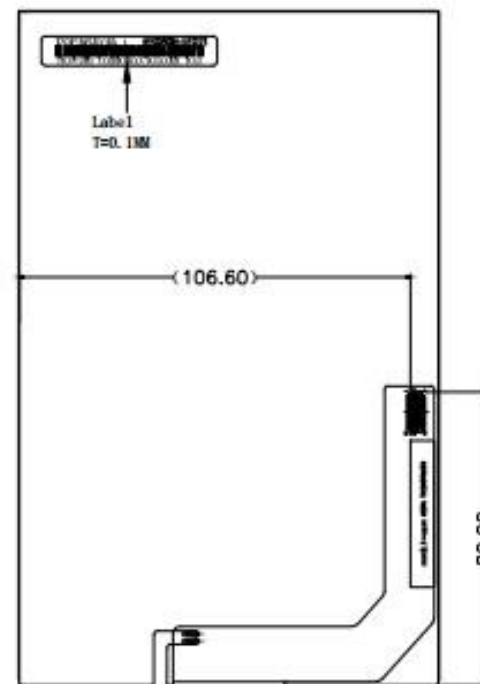

|    |            |
|----|------------|
| 1  | LEDA       |
| 2  | LEDA       |
| 3  | LEDA       |
| 4  | NC         |
| 5  | LEDK       |
| 6  | LEDK       |
| 7  | LEDK       |
| 8  | LEDK       |
| 9  | GND        |
| 10 | GND        |
| 11 | MPI_D2+    |
| 12 | MPI_D2-    |
| 13 | GND        |
| 14 | MPI_D1+    |
| 15 | MPI_D1-    |
| 16 | GND        |
| 17 | MPI_CLK+   |
| 18 | MPI_CLK-   |
| 19 | GND        |
| 20 | MPI_D0+    |
| 21 | MPI_D0-    |
| 22 | GND        |
| 23 | MPI_D3+    |
| 24 | MPI_D3-    |
| 25 | GND        |
| 26 | TE         |
| 27 | RESET      |
| 28 | NC         |
| 29 | VDDIO/1.8V |
| 30 | VDD/3.3V   |
| 31 | VDD/3.3V   |