


NOTES:

1. Rating: 160V 8 A
PITCH: 3.81 mm
2. Insulation Withstands Voltage:
AC 2500V/MIN
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C~+105°C
5. Screw Torque Value: $\frac{6}{2}$ kgf-cm
6. Suitable Electric Wire: AWG 16~28
7. Undimensioned Tolerances:

—	∩	∇	□	0.05/10
∩	∩	∩	∩	0.2/10
∩	∩	∩	∩	0.05/10
DIMENSIONS				±0.3
TOLERANCES				

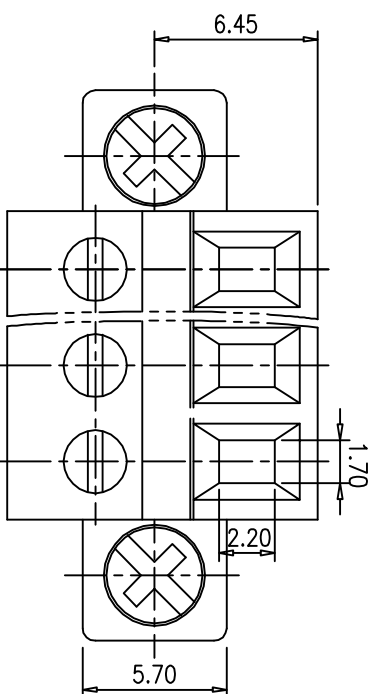

∇	工程變更	XM	06.11.24
∇	工程變更	H J	06.04.17
REV.	CONTENT	CHK.	DATE

7	SCREW	S000013300	2	steel	M2.5/Zn Plated
6	COVER	0070C7XX00	1	PA	GREEN
5	SOLDER PIN	0070B01200	P	BRONZE	Ni Plated
4	WIRE-CAGE	X000007600	P	Steel	Zn Plated
3	CLAMP	0070B01300	P	SPCC	Zn Plated
2	SCREW	S000010200	P	Steel	Zn Plated
1	HOUSING	0070N4XX00	1	PA	GREEN

DWG.	Y.Y	DATE	04.06.07	UNITS	MM	SHEET/OF	1/2
CHK.		DATE		SCALE	4.5:1		
APP.		DATE		NAME	EC381FM-XXP		

DINKLE ENTERPRISE CO., LTD	DWG NO.	SP-02-EC381FMP
----------------------------	---------	----------------