


SECTION A-A

NOTES:

- ③ 1. Rating: ~~160~~³⁰⁰V 8A
PITCH: 3.81 mm
- 2. Insulation Withstands Voltage:
AC 1000V/MIN
- 3. Insulation Resistance:
1000MΩ or more at DC500V
- ⑤ 4. Using Temperature Range:
~~-40°C~+130°C~~
-40°C~+120°C
- 5. Suitable Electric Wire: AWG 22~16
- 6. Undimensioned Tolerances:

—	∩	∇	0.05/10
⊥	//	≡	0.2/10
PITCH ERROR			0.05/10
UNDIMENSIONED TOLERANCES			±0.3

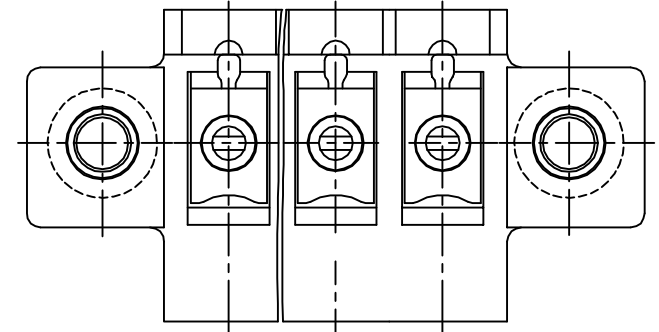

6	SCREW2	S000003400	2	STEEL	M2.5 Zn Plated
5	CLAMP	0070B00100	P	BRONZE	
4	SCREW1	S000010200	P	STEEL	M2 Zn Plated
3	END COVER	0070L00000	1	PBT	GREEN
2	WIRE CAGE	X000007400 X000002700	P	Hard Brass	M2/Ni Plated M2/Zn Plated
1	HOUSING	0070N00000	1	PBT	GREEN
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

③	工程變更	TXK	04.02.13	DWG.	梁瓊耀	DATE	99,02,28	UNITS	MM	SHEET/OF	1/1
⑥	工程變更	YFY	03.10.09	CHK.		DATE		SCALE	5:1 (:)	⊕	
⑤	工程變更	YFY	03.06.13	APP.		DATE		NAME			
④	工程變更	梁紅英	01.10.31	DINKLE ENTERPRISE CO.,LTD				EC381VM-□□P			
REV.	CONTENT	CHK.	DATE					DWG NO.	SP-02-EC381VMO		